
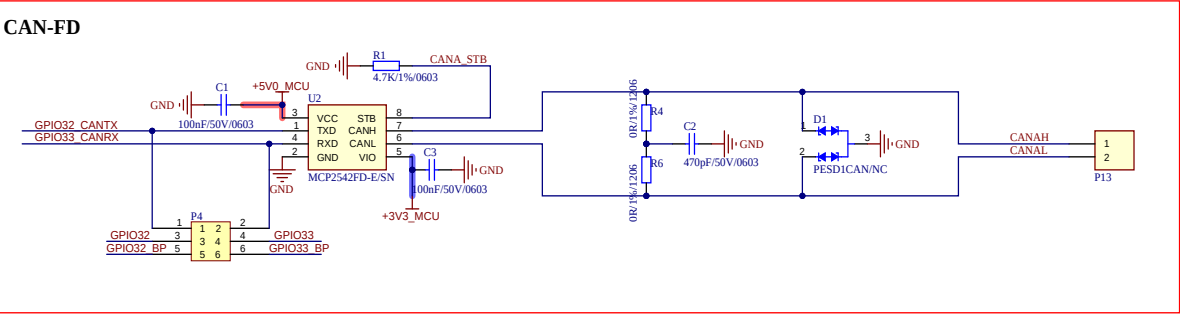
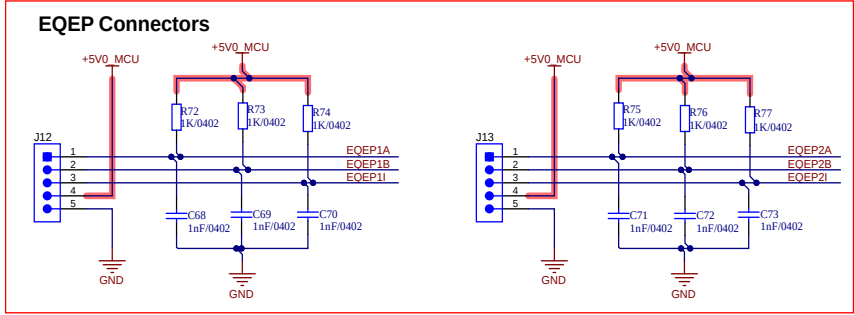
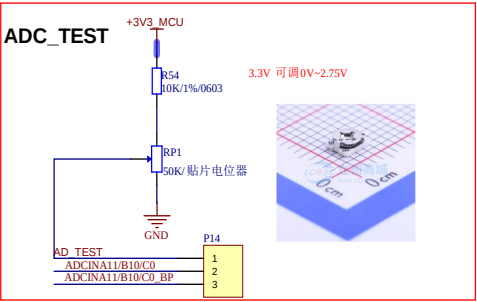
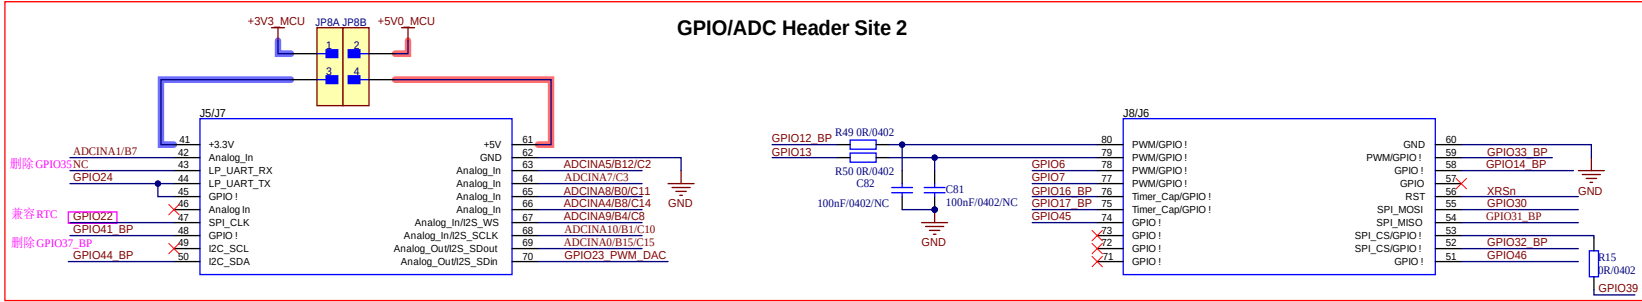
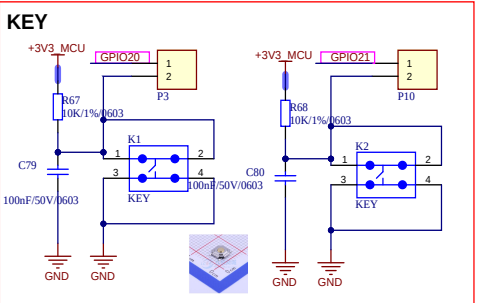
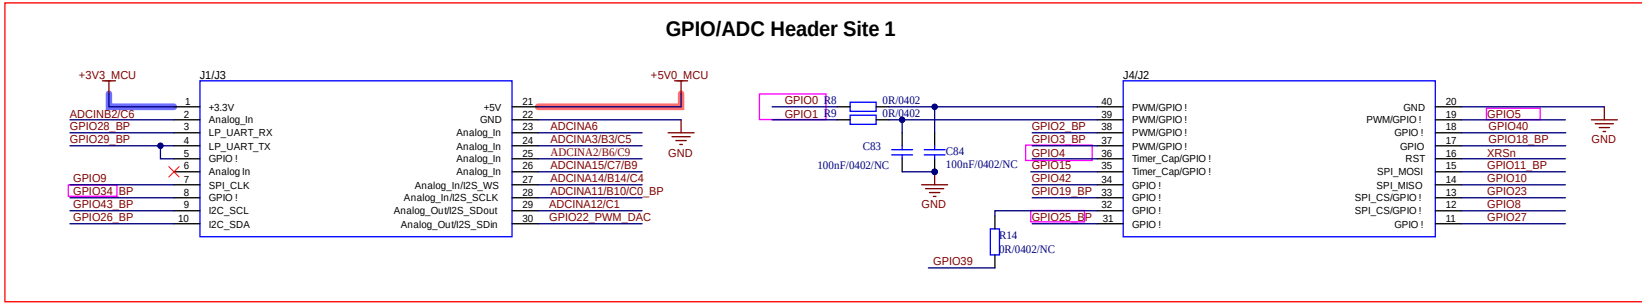
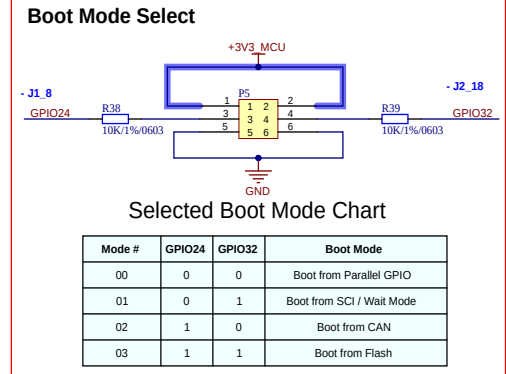
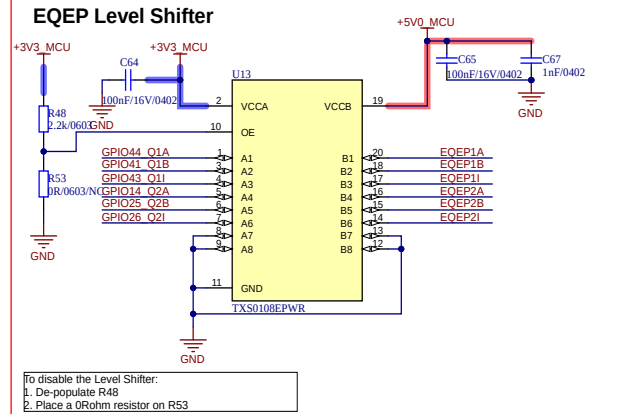
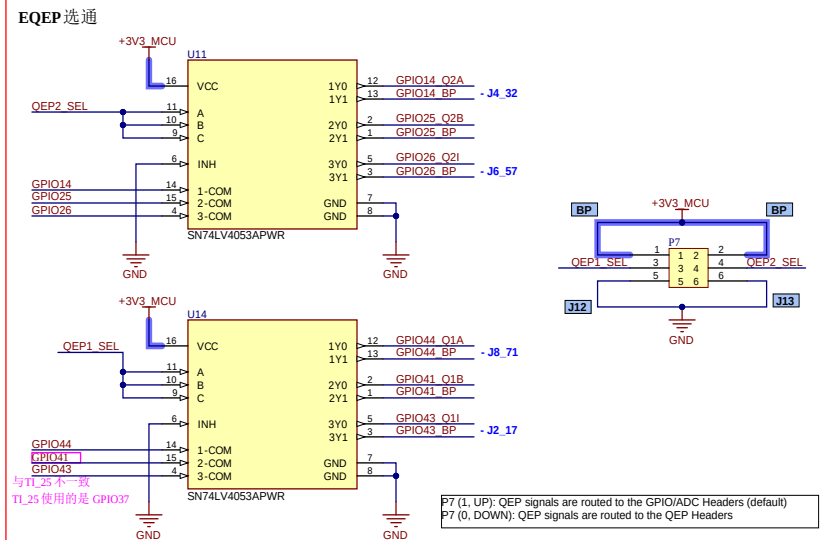
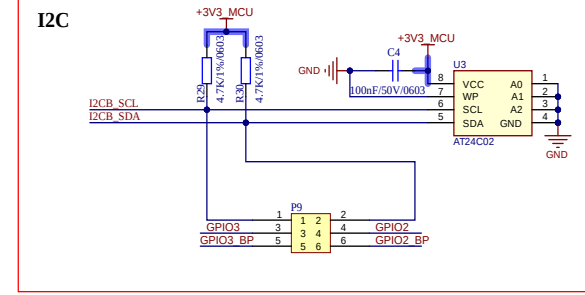
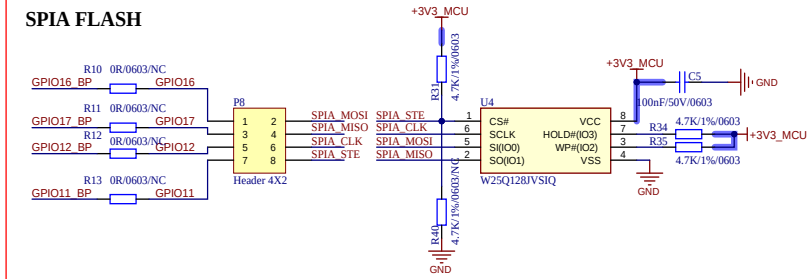
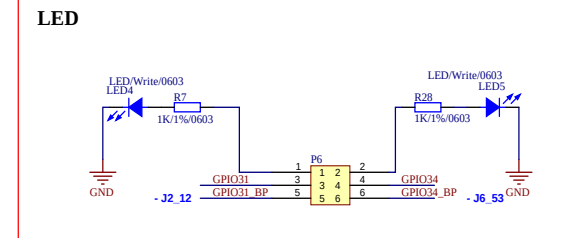
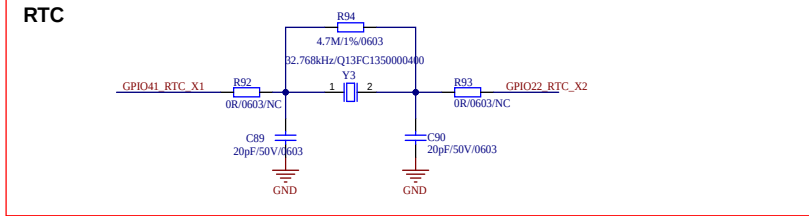





格见半导体 Draft Only

Title		
Xplorer_GS32F0025_Connectors		
Size	Number	Revision
B	1	
Date:	6/06/2025	Sheet of
File:	D:\Desktop\Xplorer_GS32F0025_Connectors	Drawn by:

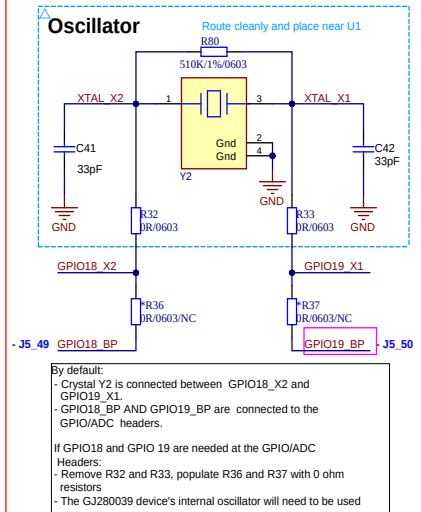

Selected Boot Mode Chart

Mode #	GPIO24	GPIO32	Boot Mode
00	0	0	Boot from Parallel GPIO
01	0	1	Boot from SCI / Wait Mode
02	1	0	Boot from CAN
03	1	1	Boot from Flash

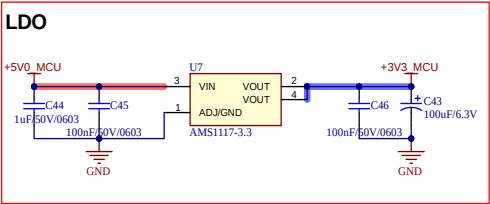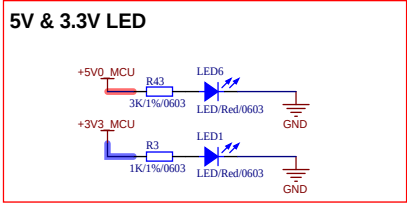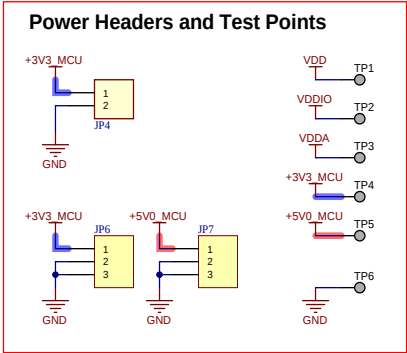


格见半导体 Draft Only

Gejian Semi. confidential - NDA Restrictions

Title			
Xplorer-GS32F0025_Power			
Size	Number	Revision	
B	5		
Date:	6/06/2025	Sheet of	
File:	D:\Desktop\Xplorer-GS32F0025_Power.Sch	Drawn By:	

GS32F002x Device

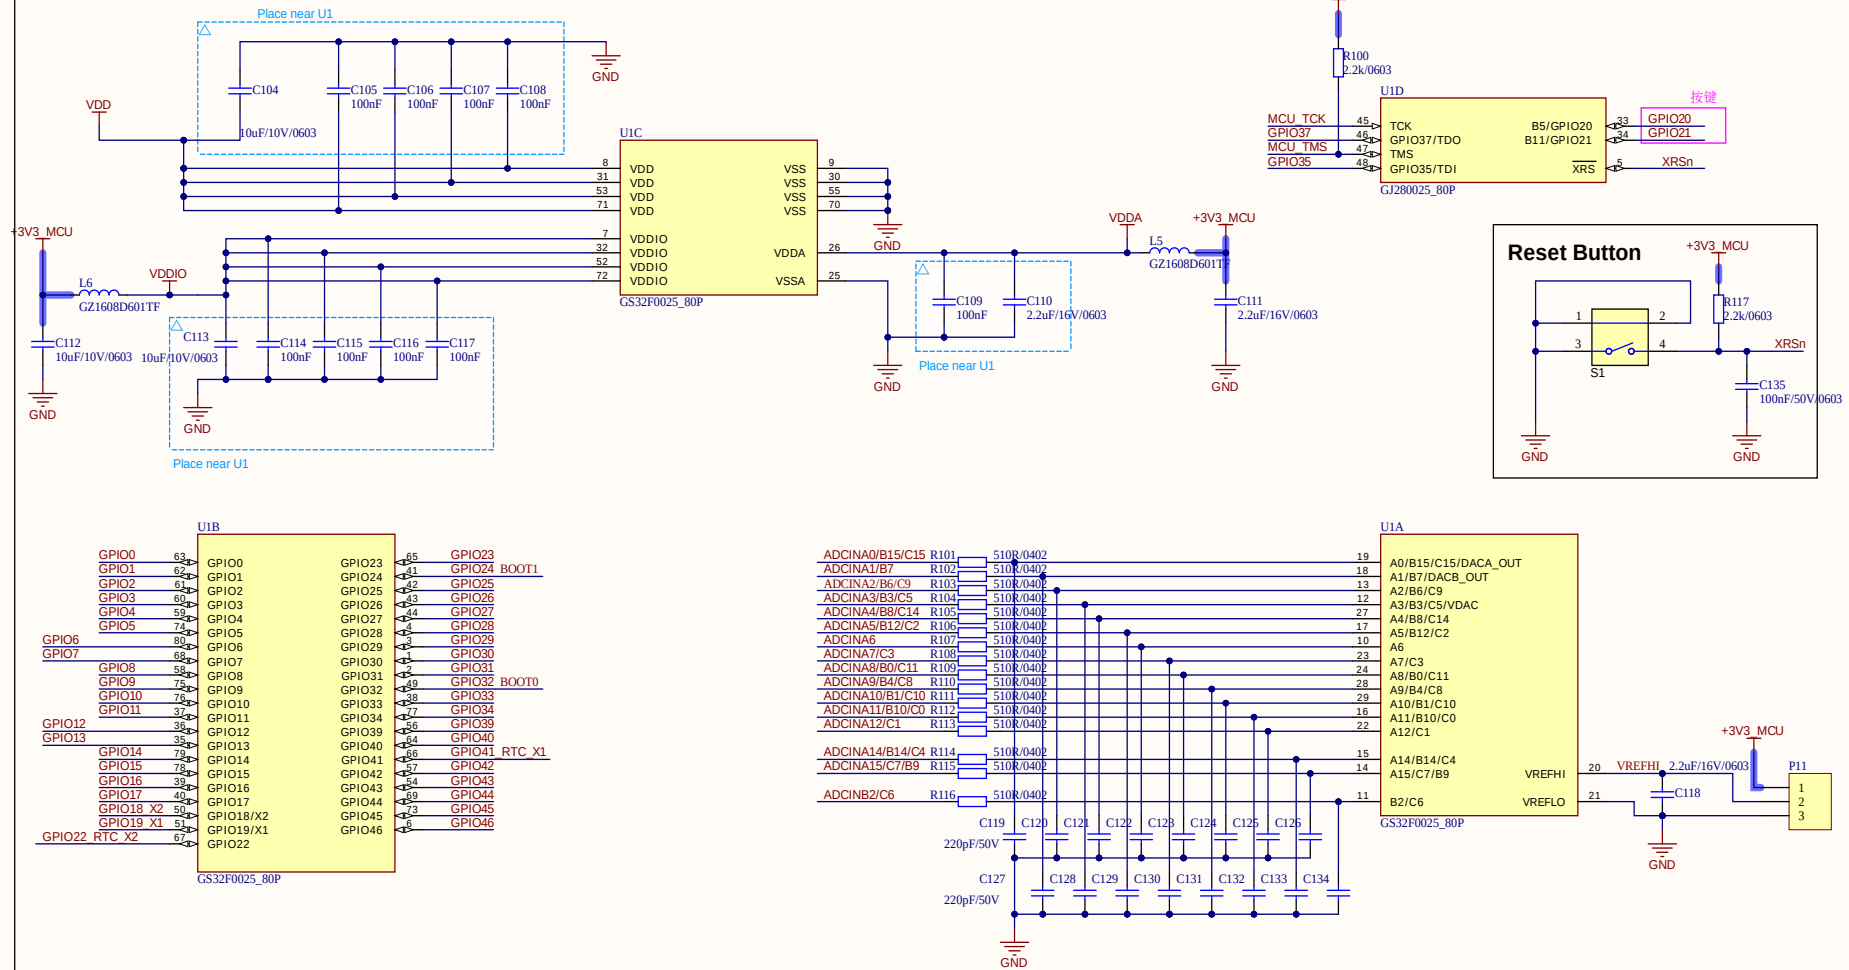

默认使用 GPIO41(EQEP) 和 GPIO22，电阻焊接

GPIO35 R44 0R/0603 MCU TDI
GPIO37 R45 0R/0603 MCU TDO


GPIO22 RTC X2 R90 0R/0603 GPIO22
GPIO41 RTC X1 R91 0R/0603 GPIO41

格见半导体 Draft Only


Gejian Semi. confidential - NDA Restrictions

Title		
Xplorer-GS32F0025_Device		
Size	Number	Revision
A3	3	
Date:	6/06/2025	Sheet of
File:	D:\Desktop\...\Xplorer-GS32F0025_Device	Drawn By:


USB

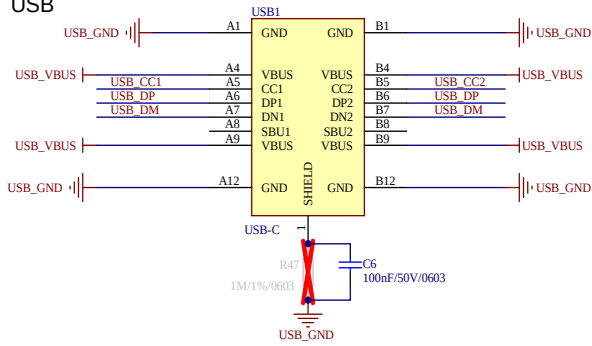


ESD




SPI

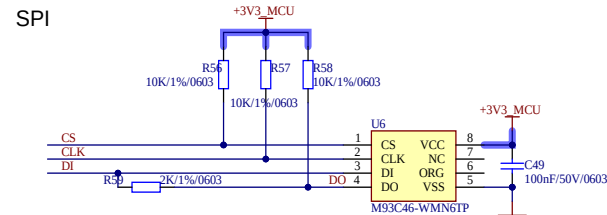

Oscillator





USB2UART

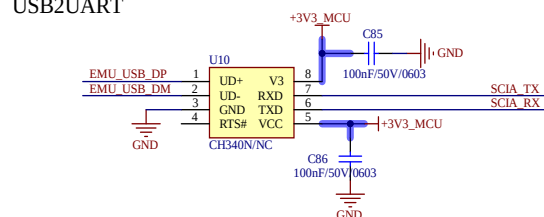

与板载调试器使用同一组串口，U10与U8 BOM 选择

Isolation Boundary

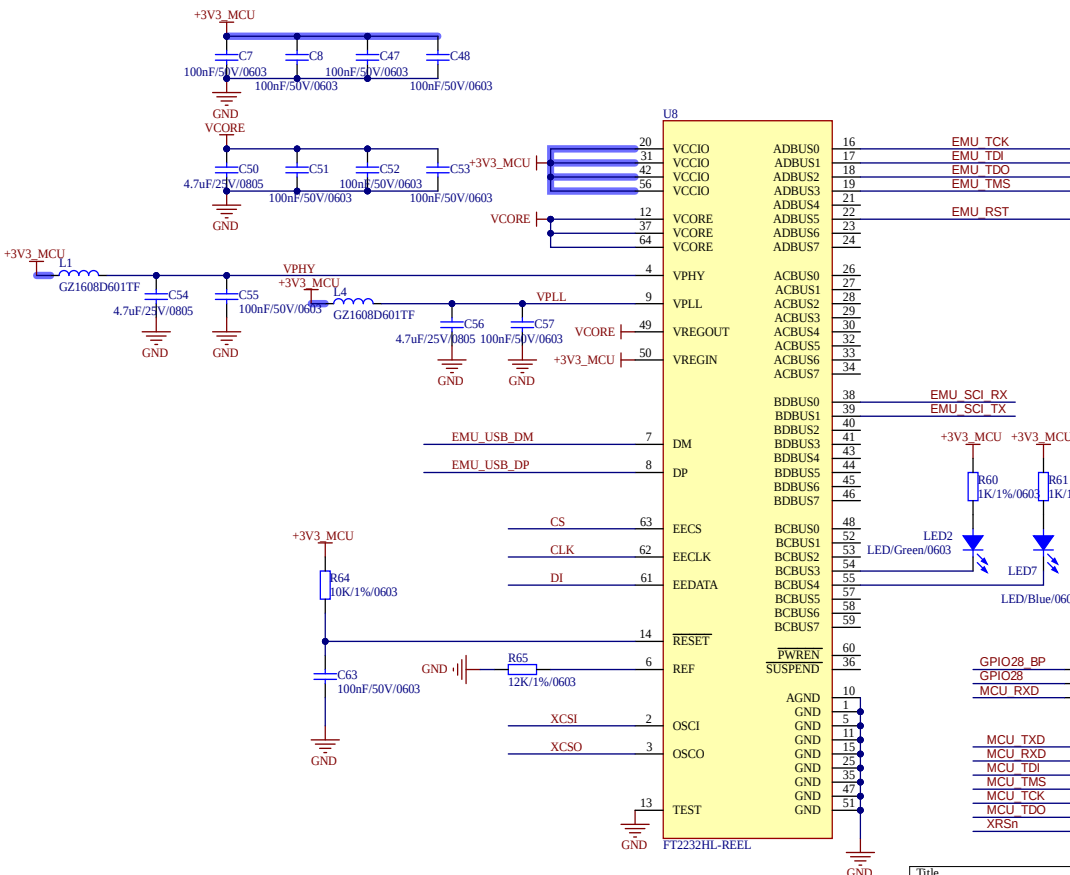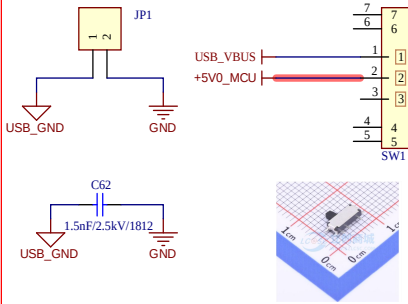

Title			Xplorer-GS32F0025_FT2322		
Size	Number	Revision			
			4		
Date:	6/06/2025	Sheet of			
File:	D:\Desktop\...\Xplorer-GS32F0025_FT2322	Submitted By:			

格见半导体 Draft Only

Gejian Semi. confidential - NDA Restrictions

